

Sonic – freestanding screens technical specification



smart interior design

FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO

Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222



General informations:

Warranty:

products – 3 years.

Electrical components and fabric – 2 years.

Certificate – MFC:



Certificate – fabric:



Assembly:

product delivered in separate elements

Packing:

cardboard, packing film

Compliant with standards:

PN-EN ISO 354:2005

Boards density:

12 mm – 690 – 750 kg/m³

18 mm – 650 – 690 kg/m³

28 mm – 610 – 630 kg/m³

36 mm – 610 – 630 kg/m³

smart interior design


FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO

Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222


Sonic - freestanding screens

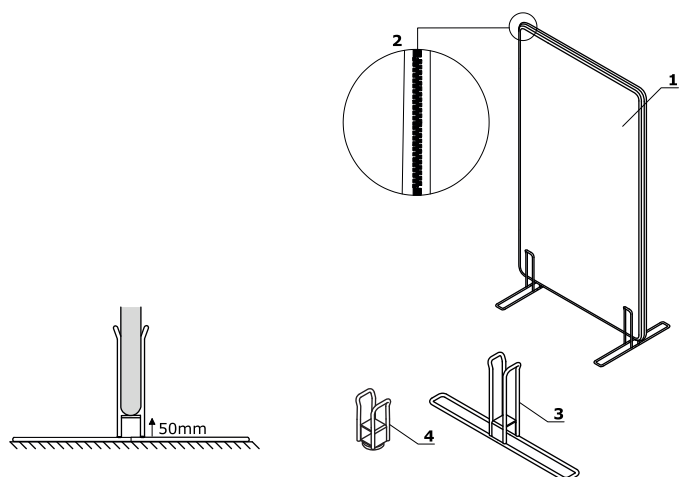


1. Fabric - accoustic class A, pinable
2. Zip fastener
3. Freestanding feet - powder coated metal
4. Spacer - powder coated metal; intended for use in screens situated between desks or other solid support from both sides

ATTENTION - Free standing panel in height W1 - 50 mm from the bottom


Sonic - connecting element for free standing screens




ZW5



ZW6



ZW7



ZW8

smart interior design


FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO


Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222

Sonic - freestanding screens *




ZW592
590 / 40 / 1250
17.2 kg




ZW594
590 / 40 / 1450
18.2 kg




ZW596
590 / 40 / 1650
19.2 kg




ZW598
590 / 40 / 1850
20.2 kg



ZW692
690 / 40 / 1250
17.7 kg




ZW694
690 / 40 / 1450
18.7 kg




ZW696
690 / 40 / 1650
19.7 kg




ZW698
690 / 40 / 1850
20.7 kg




ZW792
790 / 40 / 1250
18.2 kg



ZW794
790 / 40 / 1450
19.2 kg




ZW796
790 / 40 / 1650
20.2 kg




ZW798
790 / 40 / 1850
21.2 kg




ZW892
890 / 40 / 1250
18.7 kg



ZW894
890 / 40 / 1450
19.7 kg



ZW896
890 / 40 / 1650
20.7 kg



ZW898
890 / 40 / 1850
21.7 kg

* dimensions expressed in millimeters: width x depth x height

smart interior design


FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO


Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222

Sonic - freestanding screens *




ZW992
990 / 40 / 1250
19.2 kg



ZW994
990 / 40 / 1450
20.2 kg



ZW996
990 / 40 / 1650
21.2 kg



ZW998
990 / 40 / 1850
22.2 kg

Sonic - connecting element for free standing screens *



ZW5
150 / 37 / 50
0.4 kg



ZW6
150 / 116 / 50
0.4 kg



ZW7
150 / 116 / 50
0.5 kg



ZW8
150 / 190 / 50
0.7 kg

* dimensions expressed in millimeters: width x depth x height

smart interior design


FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO

Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222


Fabric Nemo

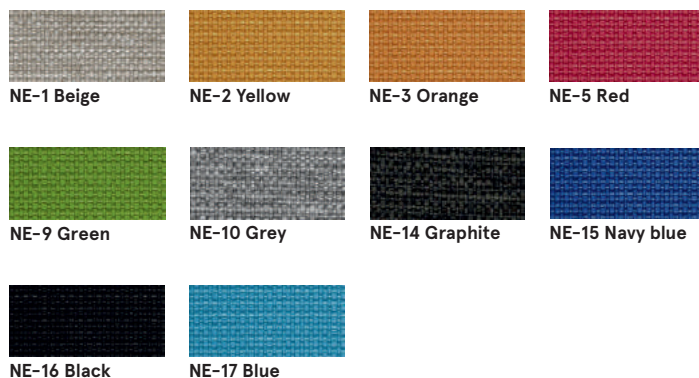

Technical data:

Material	polyester 100%
Fabric weight	366g/m2
Abrasion resistance rubs	PN_EN ISO 12947 - 2:2 100,000
Pilling resistance	scale 1-8, max. 8, PN-EN ISO 105 - B02 (3-4)
Colour fastness to light	scale 1-5, max. 5, PN-EN 1021 - 2,
Colour fastness to rubbing	PN-EN 1021 - 1
	skscale 1-5, max. 5, EN ISO 105x12 (wet/dry) 4-5

Fabric Runner - second price group

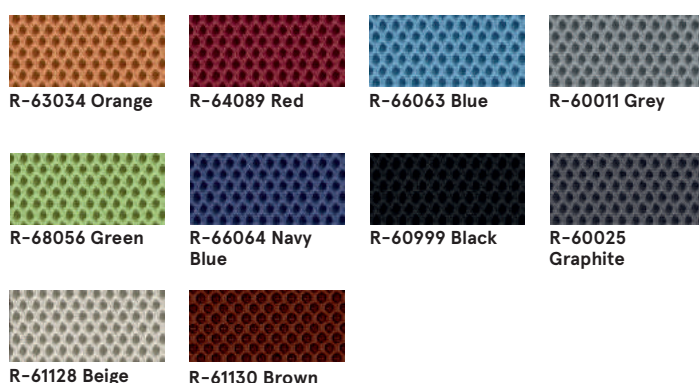

Technical data:

Material	80% polyester, 20% post-consumer recycled polyester
Fabric weight	510 g/lm (16.45 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2 70,000 Martindale cycles
Pilling resistance	scale 1-5, max 5, EN ISO 12945-2 (4-5)
Colour fastness to light	scale 1-8, max 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max 5, EN ISO 105x12 (wet/dry) 4-5
Acoustic test sound absorption	ISO 354
Flammability	BS EN 1021-2 Match, CA TB 117-2013, BS EN 1021-1 (cigarette) Class Uno UNI 9175 Class 2, EMME

Fabric Medley - second group



Technical data:

Material	polyester 100%
Fabric weight	510 g/lm (16.45 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2, 75,000 cykli Martindale
Pilling resistance	scale 1-5, max. 5, EN ISO 12945-2 (4)
Colour fastness to light	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max. 5, EN ISO 105x12 (wet/dry (4-5/4-5))
Acoustic test sound absorption	ISO 354
Flammability	BS EN 1021-1 (cigarette) BS 476 Part 7, Class 2 Class Uno UNI 9174 - UNI 8457 CA TB 117-2013 ASTM E 84 Class I

smart interior design

FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO

Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222

Fabric Atlantic * - second price group



Technical data:

Material	polyester 100%
Fabric weight	530 g/lm (17.09 oz/lin.yd.)
Abrasion resistance rubs	BS EN ISO 12947-2, 110,000 Martindale cycles
Pilling resistance	scale 1-5, max. 5, EN ISO 12945-2 (4-5)
Colour fastness to light	scale 1-8, max. 8, EN ISO 105-B02 (5-7)
Colour fastness to rubbing	scale 1-5, max. 5, EN ISO 105x12 (wet/dry)
Flammability	CA TB 117-2013 ASTM E 84 Class I BS EN 1021-2 (match) BS EN 1021-1 (cigarette)

Fabric River - second group



Technical data:

Material	polyester 100%
Fabric weight	300g/m2 (+/- 5%)
Abrasion resistance rubs	100,000 Martindale cycles (EN ISO 12947-1,2)
Pilling resistance	EN ISO 12945-2 (5)
Colour fastness to light	4 (EN ISO 105-B02)
Colour fastness to rubbing	dry: 4-5, wet: 3 (EN ISO 105-x12)
Flammability	BS 5852: Part 1, Ignition Source 0 (cigarette) BS 5852: Part 1, Ignition Source 1 (match) En1021 - 2

Fabric Vita - second price group



Technical data:

Material	Surface: 98,5% PVC, 1,5% PU Substrate: 50% poliester, 50% Cotton
Fabric weight	850g/m2 ± 10% (1190G/lin. m ± 10%)
Abrasion resistance rubs	BS EN ISO 5470-2, 100,000 Martindale cycles
Colour fastness to light	6 (ISO 105 - B02)
Colour fastness to rubbing	wet: 4, dry: 4 (ISO 105 - X12)
Flammability	BS EN 1021 - (cigarette) BS EN 1021 - 2 (match) BS 5852 - (Ignition Source 5) BS 7176 - (Medium Hazard)
Flexes	BS EN ISO 7854 - Method B, 400.000 Flexing cycles
Anti-microblal / Anti-fungal	AATCC 147

* There is a possibility of ordering the product in full colour spectrum of Atlantic range, as per Gabriel's pattern book, within 8 weeks

smart interior design

FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO

Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222

Fabric Xtreme – third price group



Technical data:

Material	100% Trevira Clame (CS) 100% Recykling (YS) Flame Retardant polyester. Non metallic dyestuffs.
Fabric weight	310 g/m ² ±5% (435g/lin.m ±5%)
Abrasion resistance rubs	60,000 Martindale cycles (CS) 100,000 Martindale cycles (YS)
Colour fastness to light	6 (ISO 105 - B02)
Colour fastness to rubbing	wet: 4, dry: 4 (ISO 105 - X12)
Flammability	EN 1021 - 1 (cigarette), EN 1021 - 2 (match) BS 7176 Low Hazard, NF P92-507 M1, DIN 4102 B1, UNI 9175 Class 1 IM, UNI 8456, UNI 9174 & UNI 9177 Classe Uno, ÖNORM B 3825 & A 3800-1 NF D 60-013

Fabric Synergy – third price group



Technical data:

Material	95% Virgin Wool, 5% Poliamid
Fabric weight	400g/m ² ±5% (560 g/lin.m ±5%)
Abrasion resistance rubs	Independently certified ≥100,000 Martindale cycles
Colour fastness to light	5 (ISO 105 - B02)
Colour fastness to rubbing	ISO 105 - X12 - wet: 4, dry: 4
Flammability	EN 1021 - 1 (cigarette), EN 1021 - 2 (match), BS 7176 Low Hazard, UNI 9175 Classe 1 IM, ÖNORM B 3825 & A 3800-1

smart interior design

FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO

Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222

Fabric Silvertex – third price group

There is a possibility of ordering the product in full colour spectrum of Silvertex range, as per Spradling's pattern book, within 15 working days.

Technical data:

Material	Topcoat: 100% Vinyl Backing: 100% Polyesterr Hi-Loft™
Fabric weight	685 gr/m2
Abrasion resistance	>300,000 cycles Martindale
UV-resistance	>= 7 (1000 hours, blue wool scale)
Cold Crack resistance	-23°C
Flame retardancy	NF P 92-503 / M2 EN 1021, Part 1&2 DIN 4102 B2 ÖNORM B 3825, Gruppe I – Schwerbrennbares Verhalten ÖNORM A 3800, Teil I, Qualmbildungsklasse QI – schwachqualmend IMO Res. MSC.307 (88) (2010 FTP Code) Annex I Part 8 (MED) Marine Equipment Directive in its current valid version UNI 9175 (1987) / UNI 9175/FAI (1994) Classe I.IM (uno I EMME) UNE 23.727-90 IR /M2 EN 71-2: 2006+AI: 2007 Safety of Toys – Part 2: Flammability ECE R 118 (replaces Directive 95/28/EC) FMVSS 302 FAR 25/853
Antimicrobial	Antifungal Protection, Antibacterial Protection, Antimycotic Protection

Fabric Atlas – fourth price group



Technical data:

Material	90% new wool, 10% nylon
Fabric weight	286g/m2, 400g/lm
Abrasion resistance rubs	100,000 cykli Martindale, EN ISO 12947
Colour fastness to light	ISO 105 B02: 6-7
Colour fastness to rubbing	ISO 105-X12:2001, (wet/dry) 4-5/4-5
Flammability	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, BS 5852 ignition source 3, BS 5852 Part 1, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013

Fabric Field2 – fourth price group



Technical data:

Material	100% Trevira CS
Fabric weight	321g/m2, 450g/lm
Abrasion resistance rubs	100,000 cykli Martindale, EN ISO 12947
Colour fastness to light	ISO 105 B02: 5-7
Flammability	BS EN 1021-2 Match, BS EN 1021-1 Cigarette, BS 5 5852 Crib 5, DIN 4102 B1 FAR 25.853, UNI 9177 classe 1, US Cal. Bull. 117-2013

smart interior design

FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO

Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222

Frame, accessories



M009 Aluminum
semi-matt RAL9006



M015 White
semi-matt RAL9010



M154 Anthracite
semi-matt RAL7043



M115 Black
semi-matt RAL9005

smart interior design

FOR YOUR OFFICE

WWW.SMARTINTERIOR.RO

Strada Ziduri Intre Vii, Nr 19, Corp A, Sector 2,
Bucuresti.

Email: office@smartinterior.ro
tel: 0742220325 / 0733626222